

NOTICE TO CONTRACTORS
FOR
Sidewalk Rehabilitation Project
Town of Minetto

Sealed proposals will be received at the Town of Minetto Town Hall, 6 Community Drive, Minetto, New York for the Sidewalk Rehabilitation Project until 5:00 pm Friday October 6, 2017. On Tuesday, October 10, 2017 at the 7:30 pm Town Board meeting, the sealed proposals will be opened and publicly read by Councilman Familo of the Town of Minetto, New York.

This project generally consists of the following: repair of existing sidewalks in the town of Minetto

Sets of plans and specifications for the work under this contract may be obtained at the Town of Minetto Town Hall located at 6 Community Drive; during the hours of Monday – Friday 9am to noon and 1:15 pm to 5:00 pm or at www.townofminetto.net. Plans and specifications will not be mailed.

Sealed bids are to be addressed to the Town Clerk attn: Sidewalks PO Box 220 Minetto NY 13115.

By Order of the Town Board of the Town of Minetto
Jennifer Allen, Town Clerk

**Town of Minnetto
Sidewalk Rehabilitation Project**

CONTRACTOR'S RESPONSIBILITIES:

1. Flag width on County Route 24 is 42"
 2. Flag length shall be 5 feet.
 3. Expansion joints of creosote paperboard shall be installed every 20 feet, which is equal to 4 flags.
 4. Depth of concrete is to be 3.5 inches, except where a gravel driveway/or otherwise specified situation is encountered. In these scenarios the depth of the concrete shall be 5.5 inches.
 5. Concrete is to be 4,000 pound concrete with a six percent air entrapment, poured no more than a three inch slump. A certificate from the concrete supplier attesting to this specification is required.
 6. 6"x6" wire mesh will be placed in center of pour whenever sidewalk crosses a driveway.
 7. Final finish is to be picture frame and broom finish.
 8. Seal coat (i.e., Cure-n-Seal) will be applied to concrete surface in accordance with product specifications.
 9. A six inch deep gravel base, extending 2 inches on each side of the flags shall be installed by the contractor and is to be well compacted.
 10. If necessitated by grade slope, the contractor in accordance with the Town Representative will provide proper drainage.
 11. The grade of the sidewalk shall contour with existing grade where practical, however every attempt shall be made for the sidewalk elevation to be higher than the height of the highway grade.
 12. The flags will be sloped one-quarter inch to the foot toward the highway/ditch, so that water does not puddle on the flags.
 13. Where macadam is encountered (driveway, highway, etc.) the sidewalk shall tightly abut each edge of the macadam with no cut necessary.
 14. The distance between the fog line of the highway and the new sidewalk shall approximate the existing sidewalk on the street unless otherwise indicated. In the event of questionable grade, obstacles, or other determinations, the Town Representative shall make final determination.
 15. Any damage to yards/property that occurs as a result of the contractor's work shall be completely repaired by the contractor to be equal to or better than its previous state.
 16. Contractor is required to post a performance bond, in escrow, for the value of the contract.
 17. Contractor is required to spread topsoil to the area on either side of the sidewalk, complying with grade requirements. Seed, rake and roll seeded area.
 18. Contractor is required to provide documentation that prevailing wage rate is paid to employees.
 19. If indicated on site plan, Contractor may be responsible for repair/replacement of macadam driveway in close proximity to sidewalk in order to ensure that the grade is equal to that of the sidewalk.
 20. All designated cross walks will feature an installed detectable warning unit in the concrete surface.
 21. Contractor is responsible for obtaining all UFPO information.
 22. Contractor is responsible for contacting property owner/resident if a driveway is to be blocked by a sidewalk crossing.
 23. If indicated, the Contractor may be responsible for removal of existing sidewalk flags, and associated site work in order to ensure the site is at the correct elevation.
- Measurements on the accompanying site plans are approximate. Precise measurements are the responsibility of the bidder.

- The Town of Minnetto reserves the right to accept or reject any and all bids.

Bid shall include: Certification of Workers Compensation Insurance, Certificate of Liability Insurance, Non-Collusion Statement, Fair Wage Statement.

The Town of Minnetto reserves the right to accept/reject any and all bids.

**Town of Minnetto
Sidewalk Rehabilitation Project**

Matthew Hogan Property (39' normal depth) ----- Mark Fragle Rental Property – 77 County Route 24 (Continued below)

--	--	--	--	--	--	--	--	--	--

Mark Fragle Rental Property – 77 County Route 24

Fill this area and pave to match corrected sidewalk elevation	
Driveway Depth 17'	
Pave this area as needed to meet corrected sidewalk elevation	


Hogan property described above.

- Total length = 95'
- Normal depth = 78'
- Driveway depth = 17'
- Sidewalk width = 42"
- Flag length = 5'

Pave driveway on both sides of sidewalk necessary to match grade and protect sidewalk. Contractor responsible for removal of existing flags and all pre-pour and finished site work.

**Town of Minnetto
Sidewalk Rehabilitation Project**

Matthew Hogan Property – 71 County Route 24 (Near utility pole at east boundary line)

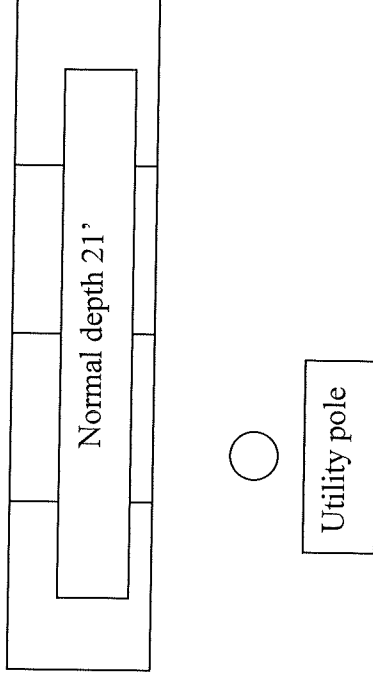

Total length = 21'
Normal depth = 21'
Driveway depth = 0'
Sidewalk width = 42"
Flag length = 5'

Contractor responsible for removal of existing flags and all pre-pour and finished site work.